

The efficient and reliable method to bundle boxes, printed matter, corrugated carton and textiles of different sizes.

The versatility of our tying machines is almost unlimited: whether soft or firm products.



JET-A-50-S







JET-A-50-S Fully Automatic Tying Machine

Technical data

Machinery dimensions:

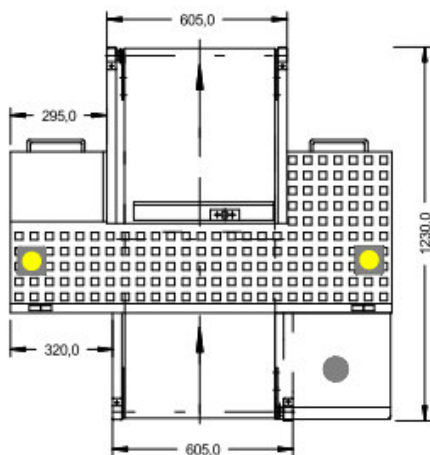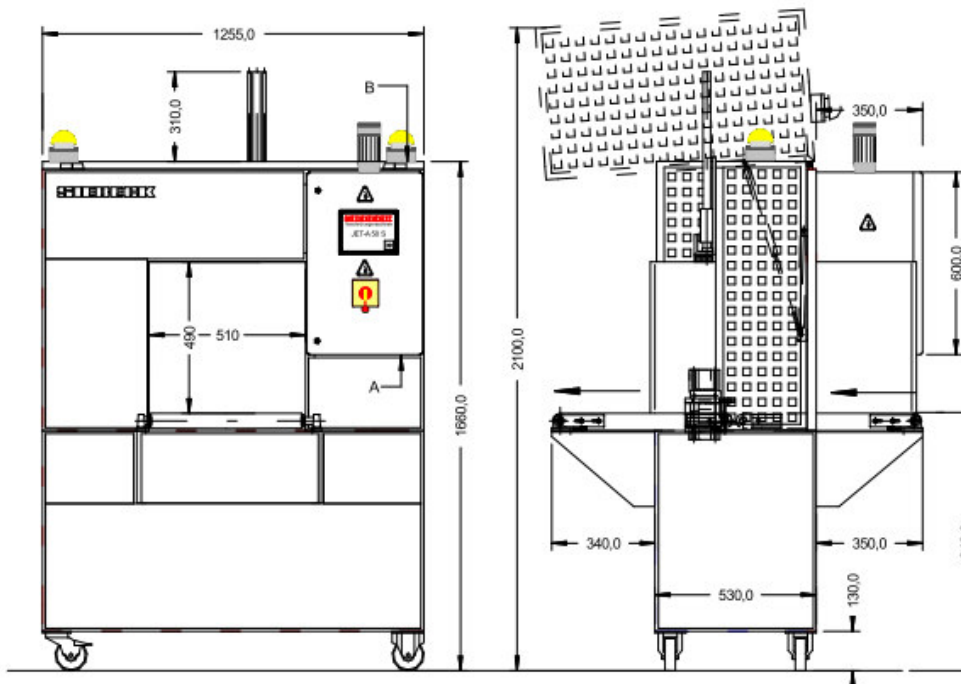

Position A
Connected elec.load: 170-260 volts / 1ph.alternat. current / 50-60 Hz / 1,8 kW

Position B
Compressed air: 50 litres per minute / 2 bar

All dimensions in mm/modifications reserved

Machine performance: up to 52 cycles per minute, with single tying, plus transport time

Machine weight: 390 Kg

Noise pressure level: 80 dB(A) as per EN 11204 (without product / without string)

Proper use: tying packaging (max. 35kg)